



CV282101

CA050300:

Flex pan set, 3 pcs.

CA051301:

Teppan Yaki

CA052300:

Griddle Plate

CA055300:

Flex pan large

CA084010:

Acoustic filter

CA282112:

Recirculation replenishment filter CV

AD857050:

Plinth diffuser for CV282/482/492

CA082011:

Kit unducted recirculation

CA082061:

Kit ducted recirculation, 60 cm worktop

CA082071:

Kit ducted recirculation, 70 cm worktop

CA084010:

Acoustic filter

Flex induction cooktop with integrated ventilation system 200 series
80 cm

CV282101

- Flex function for combining the rectangular cooking areas
- Flexible positioning of cookware is allowing all the chefs to effortlessly use bigger size and rectangular shaped cookware such as Teppan Yaki or griddle pan accessories, providing exceptional adaptability.
- Fully automatic ventilation system functions
- Large-scale metal grease filter, easy to remove, dishwasher-safe
- Control your appliance directly via your smartphone
- Flex function for combining the rectangular cooking areas

Free positioning of cookware inside combined cooking areas

Highly efficient ventilation system integrated in the cooktop

Fully automatic ventilation system functions

Large-scale metal grease filter, easy to remove, dishwasher-safe

Energy-saving, low-noise fan

Air extraction or air recirculation system

Integrated activated charcoal filter easily removable from above for air recirculation system

Twist-Pad control with removable, black magnetic knob

Easy control of all functions with bicoloured display

Cooking zones

2 flex induction cooking areas 24x20 cm (2200 W, with booster 3700 W), linked together 24x40 cm (3300 W, with booster 3700 W).

Performance of ventilation system

Air extraction:

532 / 636m³/h.

70 / 74 dB (A) re 1 pW.

Air recirculation:

487 / 611m³/h.

67 / 72dB (A) re 1 pW.

55 / 61 dB (A) re 20 µPa.

Performance and noise level, output level 3/Intensive:

Air output according to EN 61591. Sound power level according to EN 60704-3. Sound pressure level according to EN 60704-2-13. Odour reduction for air recirculation in accordance with EN 61591.

Handling

Twist-Pad control with removable magnetic knob.

User friendly control with bicoloured display (white / orange).

Cooking zone and cooking area marking.

Electronic power control of the cooking zone in 17 output levels.

Control of ventilation system with 3 electronically controlled power levels and 1 intensive mode.

Features

Flex function for rectangular cooking areas.

Automatic pot detection when the cooktop is

switched on.

Automatic sensor-controlled or manual run-on function.

Professional cooking function.

Frying sensor function.

Cooking sensor function (in use with cooking sensor CA 060 300).

Booster function for pots.

Booster function for pans.

Keep warm function.

Automatic sensor-controlled performance adjustment of the ventilation system.

Automatic activation of the ventilation system when a cooking zone is used.

Interval ventilation, 6 min.

Removable, dishwasher-safe grease filter unit.

High-grade black zinc die-casted cover for ventilation system, dishwasher-safe.

Fan technology with highly efficient, brushless DC motor (BLDC).

Airflow-optimised interior for efficient air circulation.

Stopwatch.

Cooking timer for up to 99 minutes.

Short-term timer.

Memory function.

Options menu.

Power management.

Grease filter and activated charcoal filter saturation indicator.

Consumption data

Energy consumption 56.9 kWh/year.

Sound level min. 61 dB / max. 70 dB normal mode.

Selected digital services (Gaggenau Home Connect)

Home network integration for digital services (Home Connect) wireless via WiFi.

Remote control and monitoring of ventilation.

Remote monitoring of cooking zones.

Remote diagnostics.

Safety

Main switch.

Operation indicator.

Pot detection.

2-stage residual heat indicator.

Child lock.

Safety shut-off.

Detachable, dishwasher-safe two-stage overflow protection.

Removable overflow container, 0,9-litre capacity, dishwasher-safe.

Planning notes

Bottom cabinet width: min. 60 cm.

Worktop depth: min. 60 cm with unducted recirculation, min. 65 cm with ducted recirculation/extraction.

Immersion depth 227 mm.

The unducted recirculation set CA 082 010 requires a vertical aperture of min. 25 mm behind the backpanel of the furniture.

Suggested for ideal performance are 50 mm.

The air outlet on the backside of the appliance can directly be accessed with a flat duct element (DN 150).

In air extraction a one-way flap with a maximum opening pressure of 65 Pa should be installed.

The equivalent ducting length to ensure good performance is Lmax 28 m.

For optimum performance in air recirculation we recommend an outflow surface area of at least 440 cm².

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended.

Appliance must be fixed from underneath.

Comply with the clearances from underneath the worktop to the overflow container: min. 300 mm to remove and empty the container.

Appliance weight: approx. 27.

The appliance must be freely accessible from below.

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the power supply line of the ventilation appliance needs a suitable safety switch.

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

The bearing capacity and stability, in the case of thin worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.

Joint width may vary due to dimensional tolerances of the glass ceramic cooktop and the worktop cut-out.

Special accessories (order as spare parts):

Part No. 17006018 Frying sensor pan, ø 20 cm

Part No. 17006184 Frying sensor pan, ø 24 cm

Connection


Total connected load 7.4 KW.

Connecting cable 1.50 m without plug.


Power consumption standby/display off 0.5 W.

Power consumption standby/network 2.0 W.

Please check the user manual for how to switch off the WiFi module.

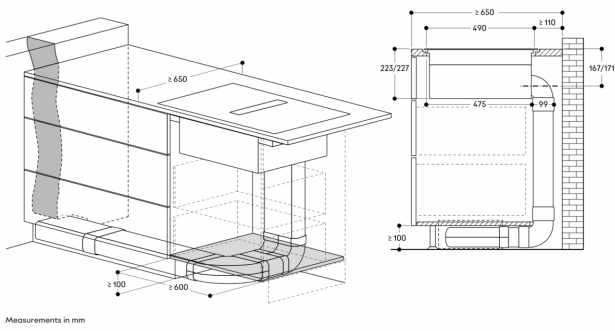


Side view with kit ducted air recirculation 700 mm worktop depth; flush installation

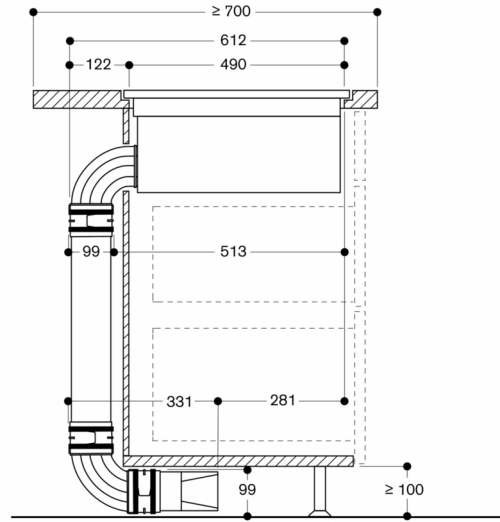

Not recommended for non-thermally insulated outer wall or floor ($U \geq 0.5 \text{ W/m}^2\text{K}$)

Measurements in mm


Side view with kit ducted air recirculation 600 mm worktop depth; flush installation

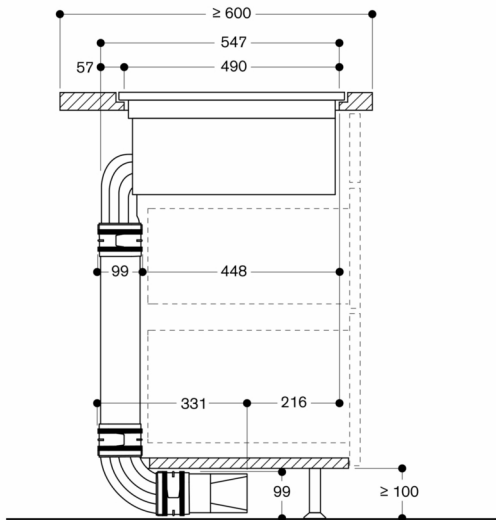

Not recommended for non-thermally insulated outer wall or floor ($U \geq 0.5 \text{ W/m}^2\text{K}$)

Measurements in mm


Side view with unducted recirculation; flush installation

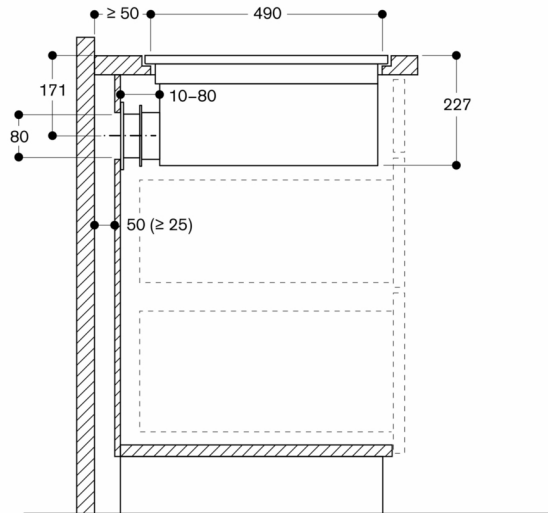


Not recommended for non-thermally insulated outer wall or floor ($U \geq 0.5 \text{ W/m}^2\text{K}$)

Measurements in mm



View from above



Cross section

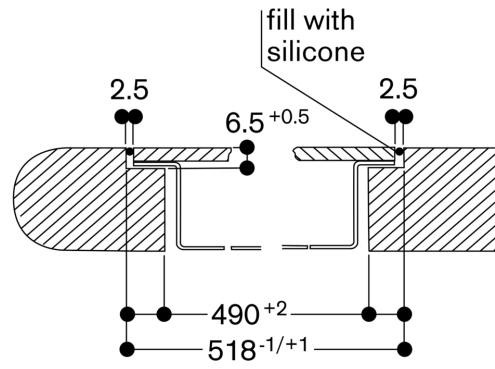


Longitudinal section

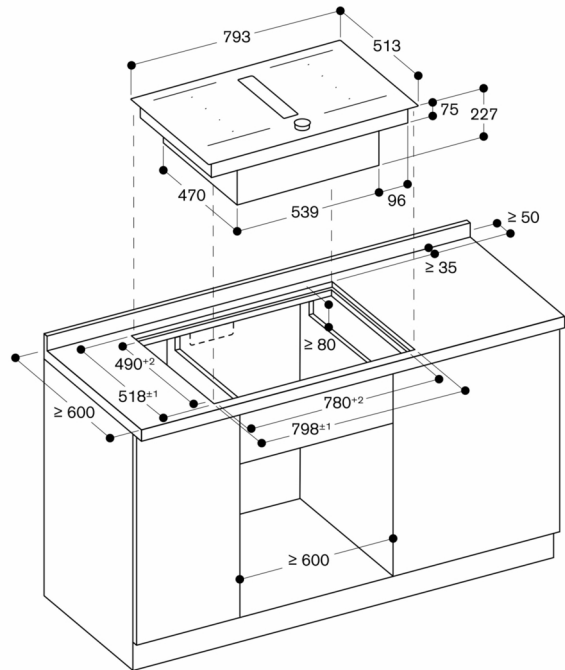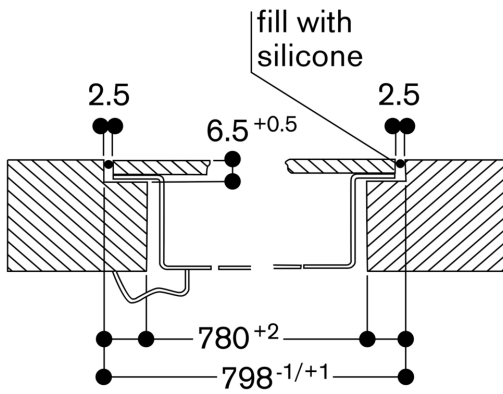


Measurements in mm

Front view

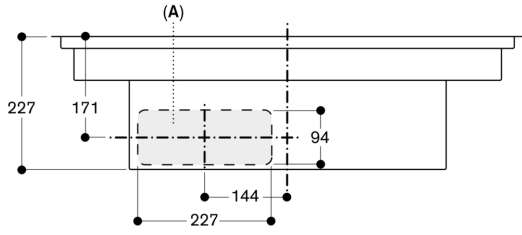


A: Connected directly at the rear
measurements in mm

Front view - furniture cut-out for unducted recirculation; flush installation

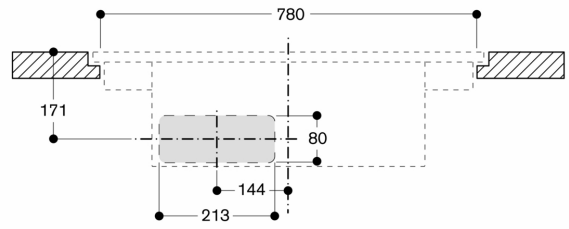


Measurements in mm


Front view of CV 282 with ducted recirculation

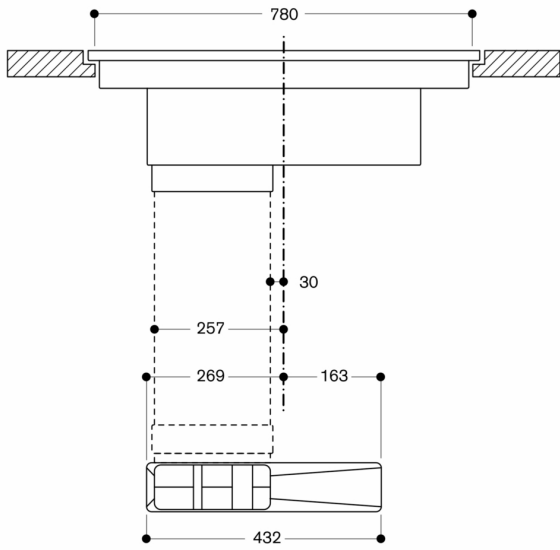


Measurements in mm

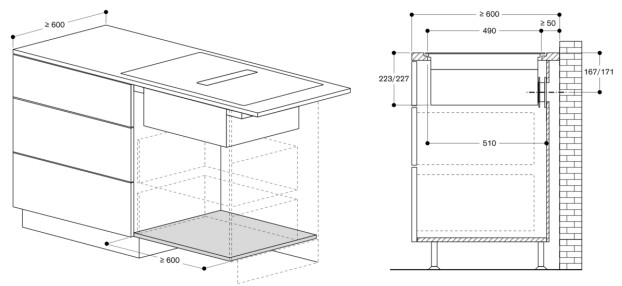


measurements in mm

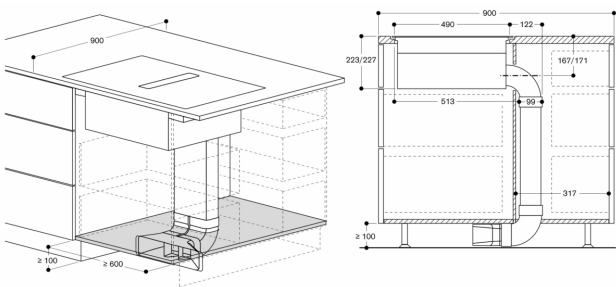


measurements in mm

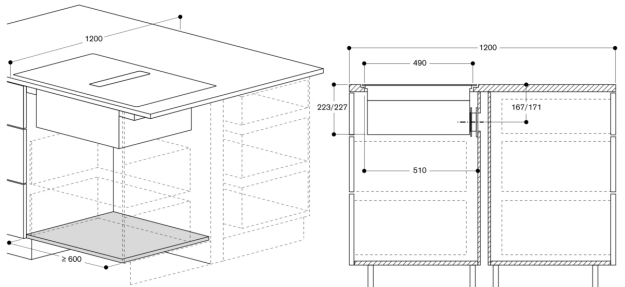


measurements in mm

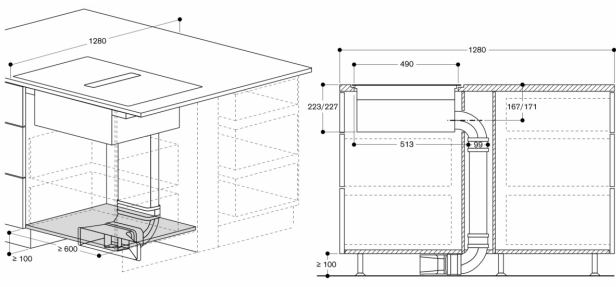


measurements in mm

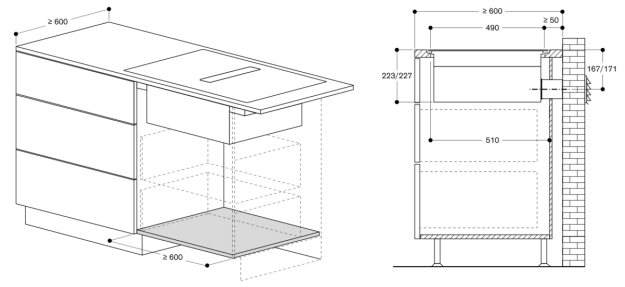


measurements in mm

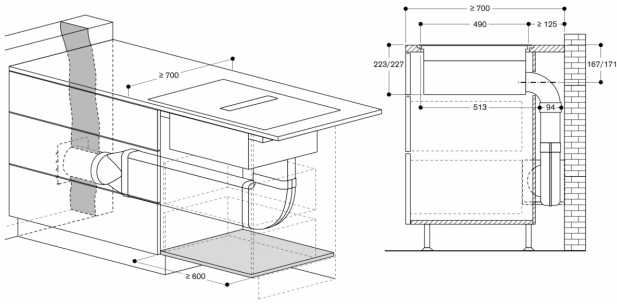


measurements in mm

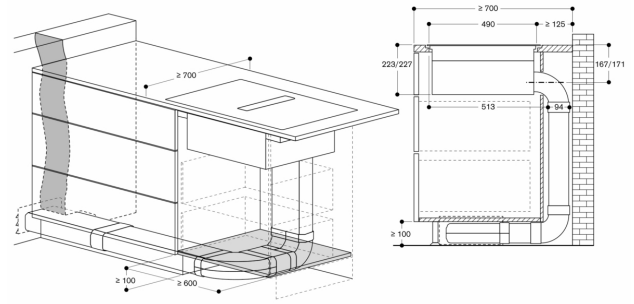

measurements in mm

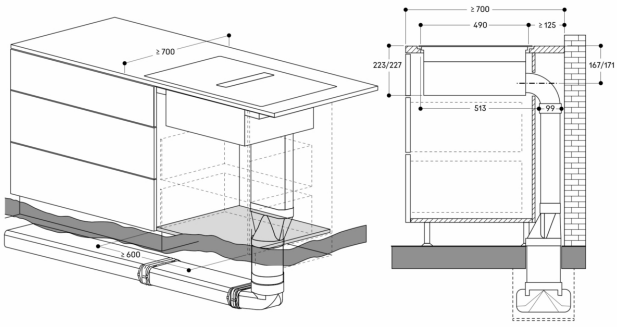

Measurements in mm

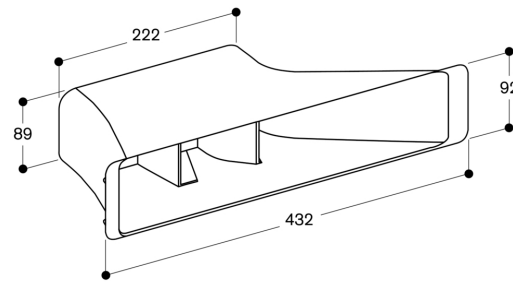

measurements in mm