Uso

Multi Function Mixer Tap System
Features & Specification

ITALIAN TAPWARE

- A kettle and mixer-tap combined
- Filtered boiling (98°C), standard hot & cold water
- Filtered cold water available with T-fitting (reduces water flow)
- Simple installation easily replaces your existing tap
- Easy-grip hot water leaver
- High quality DZR Brass
- Elegant one-piece design
- Smooth laminar flow
- An efficient use of space in your kitchen
- Easy to install
- Complete installation kit supplied
- WaterMark certified
- WELS certified
- 5-year in-home warranty - Residential only

MAINS WATER PRESSURE REQUIRED

in·sink·erator®

multitap™

WATER RATING
www.waterrating.gov.au
HIGH PRESSURE
5.1 litres per minute
In accordance with AS/NZS 6400
License No. 1601
Registered Company Name
for the License Number

WaterMark Certified

Uso
Multi Function Mixer Tap System

FEATURES

- Easy-grip hot water handle
- High quality DZR Brass
- Elegant one piece design
- Smooth laminar flow
- Efficient, space and time saving
- Easy to install
- Complete installation kit
- WaterMark certified
- 5 year warranty

Product Code: MTUSO-CH
Finish: CHROME

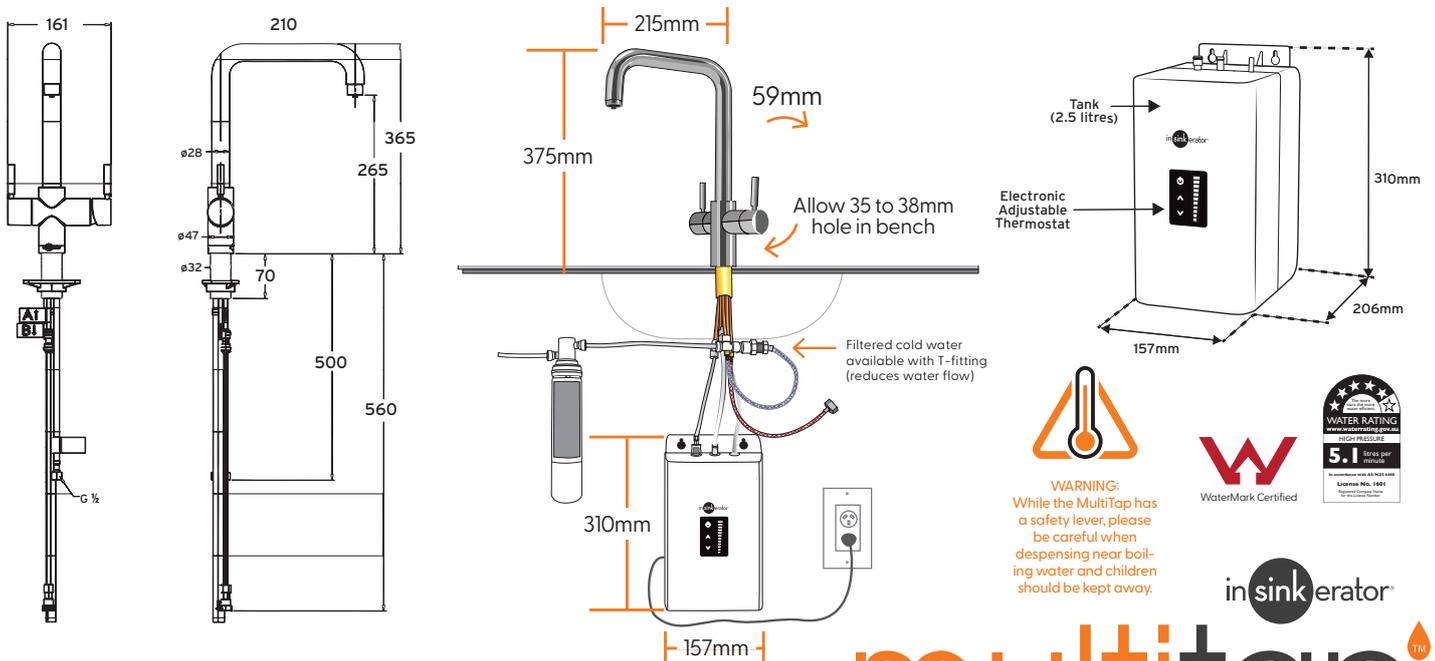Product Code: MTUSO-JB
Finish: BLACK/CHROME

Product Code: MTUSO-BR
Finish: BRUSHED

SPECIFICATIONS

- NeoTank™ is only about the size of a toaster, making it easy to hang on the back wall under your kitchen bench with minimum fuss.
- The 2.5-litre capacity is easily sufficient for most kitchen tasks while reducing the heating requirement and saving you energy costs.
- Finger-tip control with a touch panel display for precise temperature adjustment (89°C-98°C).
- Able to run on a standard electrical circuit drawing 5.6AMPs with an element size of 1.3KW.
- Quiet, energy-efficient operation.
- Easy installation with tool-free connections and dry-start protection.
- Standard 3-pin plug that plugs straight into a wall socket
- Filtration System - 1 Year Warranty (excluding replacement filter cartridge)

MAINS WATER PRESSURE REQUIRED

Easy to install under sink tank & water filter

161

210

ø28
ø47
ø32

365
265
70
500
560

G ½

215mm
59mm
375mm
Allow 35 to 38mm hole in bench
Filtered cold water available with T-fitting (reduces water flow)
310mm
157mm

Tank (2.5 litres)
Electronic Adjustable Thermostat
310mm
206mm
157mm

WARNING:
While the MultiTap has a safety lever, please be careful when despensing near boiling water and children should be kept away.

WaterMark Certified

WATER RATING
www.waterrating.gov.au
HIGH PRESSURE
5.1 litres per minute
In accordance with AS/NZS 6400
License No. 1601

insinkerator®

multitap™