

Easy to connect via the flat duct connecting piece.  
Aerodynamically optimised for minimised pressure losses and maximised flow rate.  
Complies with the Needle Flame Test (according to IEC 60695-11-5), the V2 flammability class (according to UL94) and the B1 building material class (DIN 4102-1).

**Color Variants**

AD857031

**Characteristics**

**Dimensions (HxWxD)**

**Dimensions of the packed product**

**(HxWxD)**

130x300x300

**Dimensions of the master case (mm)**

**Pallet dimensions**

171.0 x 80.0 x 120.0

**Quantity per packing unit**

5

**Standard number of units per pallet**

80

**Units per layer**

**Net weight**

0.5

**Gross weight**

0.9

**EAN code**

4242006296131

**Maximum Power**

**Voltage**

**Frequency**


**Length electrical supply cord**

**Plug type**

**Consumption and connection features**

2025-12-08

Page 1

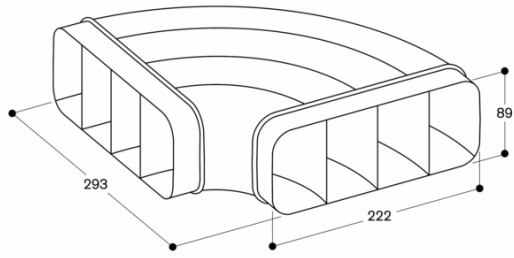

measurements in mm