



#### Color Variants

CI282112

#### Included accessories

1 x twist pad.

#### Optional accessories

CA050300

CA051301

CA052300

CA055300

CA230100

Sturdy stainless steel frame  
 Flex function for combining the rectangular cooking areas  
 Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width  
 Cooking sensor function for temperature control in pots  
 Professional cooking function for splitting the cooktop into predefined heat areas  
 Frying sensor function for temperature control in pans  
 Twist-Pad control with removable magnetic knob  
 Easy control of all functions with bicoloured display

#### Cooking zones

2 flex induction cooking areas 22.5x19 cm (2200 W, with booster 3700 W), linked together 22.5x38 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).  
 2 flex induction cooking areas 22.5x19 cm (2200 W, with booster 3700 W), linked together 22.5x38 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

#### Handling

Twist-Pad control with removable magnetic knob.  
 User friendly control with bicoloured display (white / orange).  
 Cooking zone and cooking area marking.  
 Electronic power control in 17 output levels.

#### Features

Flex function for rectangular cooking areas.  
 Cooking sensor function (in use with cooking sensor CA 060 300).  
 Professional cooking function.  
 Frying sensor function.  
 Booster function for pots.  
 Booster function for pans.  
 Keep warm function.  
 Stopwatch.  
 Cooking timer for up to 99 minutes.  
 Short-term timer.  
 Options menu.  
 Power management.

#### Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).  
 Remote monitoring.  
 Remote diagnostics.  
 Home network integration for digital services (Home Connect) wireless via WiFi.  
 The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

#### Safety

Main switch.  
 Operation indicator.  
 Pot detection.  
 2-stage residual heat indication.  
 Child lock.  
 Safety shut-off.

#### Planning notes

#### Characteristics

##### Product name/family

Cooking zone ceramic

##### Built-in / Free-standing

Built-in

##### Energy input

Electric

##### Total number of positions that can be used at the same time

4

##### Type of control setting devices

##### Required niche size for installation (HxWxD)

55 x 780-780 x 490-490

##### Width of the appliance

804

##### Dimensions

55x804x520

##### Dimensions of the packed product (HxWxD)

126x953x608

##### Net weight

16.2

##### Gross weight

18.5

##### Residual heat indicator

yes

##### Location of control panel

Front

##### Type of external control possibility

##### Basic surface material

Ceramic

##### Color of surface

Black, Stainless steel

##### Color of frame

Stainless steel

##### Length electrical supply cord

110

##### Knob Material

Full metal

##### Sealed Burners

No

##### Boost function for pots

All cooking zones

##### Type of pan support

##### Natural Gas Connection Rating

##### LP Gas Connection Rating

##### Dimension of 1st heating element (in)

##### Power of heating element (kW)

##### Power of 1st burner

##### Dimension of 2nd heating element (in)

##### Power of 2nd heating element (kW)

3300.0

##### Power of 2nd burner

##### Dimension of 3rd heating element (in)

##### Power of 3rd heating element (kW)

##### Power of 3rd burner

##### Dimension of 4th heating element (in)

##### Power of 4th heating element (kW)

##### Power of 4th burner

##### Dimension of 5th heating element (in)

##### Power of 5th heating element (kW)

##### Power of 5th burner

##### Dimension of 6th heating element (in)

##### Power of heating element (kW in boost)

[3.7]

##### Power of 3rd heating element (kW in boost)

##### Power of 4th heating element (kW in boost)

##### Power of 5th heating element (kW in boost)

3.7

##### Connection Rating

7400

##### Gas connection rating

##### Fuse protection

##### Voltage

220-240

##### Frequency

50-60

##### Universal Product Code

##### Energy input

Electric

##### Gas type preset

##### Certified gas types

##### Length of electrical supply cord (in)

##### Plug type

No plug (electrical connection by

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. Special accessories (order as spare parts):

Part No. 17006018 Frying sensor pan, ø 20 cm

Part No. 17006184 Frying sensor pan, ø 24 cm

Part No. 17006185 Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.

Appliance must be fixed from underneath.

Appliance weight: approx. 16 kg.

#### Connection


Total connected load 7.4 KW.

Connecting cable 1.10 m without plug.

Power consumption standby/display off 0.5 W.

Power consumption standby/network 2.0 W.

Please check the user manual for how to switch off the WiFi module.

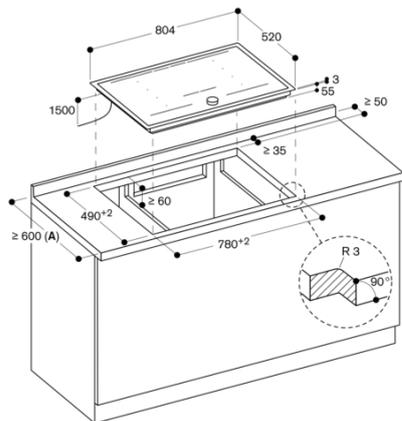

A: Please check the installation manual if the worktop depth is less than 600 mm.  
measurements in mm