



Optimal temperature insulation.
Hermetically sealed by an optimized built-in heat retention system.
Flat stainless steel cover with minimal effect to the aesthetics of the building exterior facade.

Features

Weatherproof stainless steel louvres.
3-times insulating Backflow system.
Magnetic opening and closing.
Defined opening pressure (65 Pa) prevents rattling.
Full opening even at low flow rates.

Planning notes

Conform to blower-door test.
For connection of round pipe DN 150 or flat pipe DN 150.
Wall breakthrough \varnothing 155 mm.

Color Variants

AD750054

Characteristics

Dimensions

Dimensions of the packed product

(HxWxD)

215x210x740

Dimensions of the master case (mm)

Pallet dimensions

190.0 x 80.0 x 120.0

Quantity per packing unit

Standard number of units per pallet

40

Units per layer

Net weight

2.2

Gross weight

2.8

Maximum Power

Voltage

Frequency


Length electrical supply cord

Plug type


Consumption and connection features

2025-12-18

Page 1

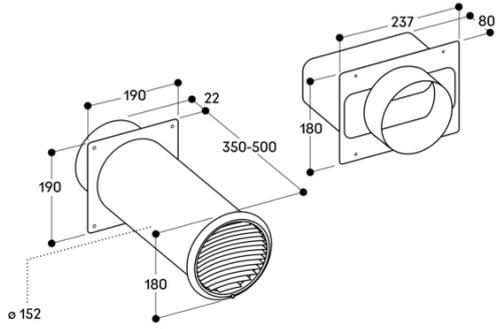

Measurements in mm

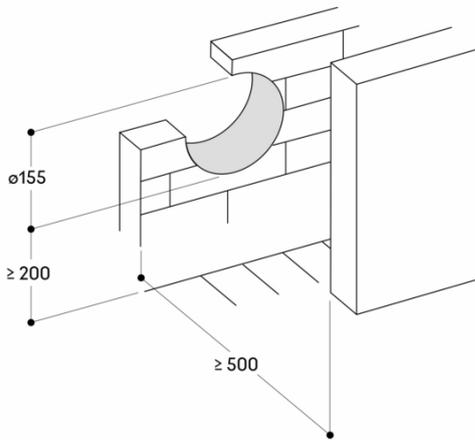

Measurements in mm