


Series 4, integrated rangehood, 75 cm, Silver metallic DHL755BAU

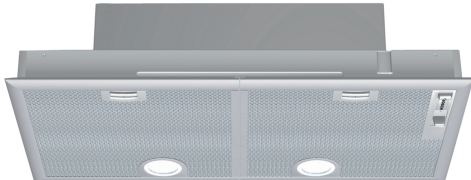

DHZ7305 Standard odor filter
DHZ7402 Installation kit for canopy

The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.

- **Especially silent:** maximum rangehood performance with minimal noise.
- **LED lighting:** energy-efficient LED lighting for bright, even cooktop illumination.
- **Intensive speed setting:** quickly removes steam and strong cooking odours for a fresher kitchen.

Typology: Built-in/Built-under
Length electrical supply cord: 130 cm
Required niche size for installation (HxWxD): ... 255mm x 700.0mm x 350mm mm
Minimum distance above an electric hob: 600 mm
Minimum distance above a gas hob: 650 mm
Net weight: 7.9 kg
Type of control: mechanical
Number of speed settings: 3-stages + intensive setting
Max. air extraction: 379 m³/h
Boost position output recirculating: 408.0 m³/h
Max. air recirculation: 278 m³/h
Boost position air extraction: 638 m³/h
Number of lights: 2
Noise level: 56 dB(A) re 1pW
Diameter of air outlet: 150 / 120 mm
Grease filter material: Washable aluminium
EAN code: 4242002721651
Connection rating: 206 W
Fuse protection: 10 A
Voltage: 220-240 V
Frequency: 50 Hz
Plug type: AU plug
Installation type: Built-in



4 242002 721651

Series 4, integrated rangehood, 75 cm, Silver metallic DHL755BAU

The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.

Design and Innovation

- Appliance colour: metallic silver
- 73 cm, Integrated Rangehood
- Suitable for ducted or recirculated extraction


Convenience

- 3 power settings plus intensive setting
- Sliding switch control for power and light
- 2 dishwasher-safe metal grease filters
- Perforated stainless steel filter covers
- Powerful twin motor


Technical Information

- 2 x LED lighting
- Power rating: 206 W
- Extraction rate according to EN 61591:
 - Min: 198.9m³/h
 - Intensive: 638 m³/h
- Extraction rate exhaust air according to EN 61591:
 - max. normal use 379 m³/h, intensive 638 m³/h
- 120 or 150mm tube connected diameter
- Noise level according to EN 60704-3 und EN 60704-2-13 exhaust air:
 - Max. normal use: 56 dB(A) re 1 pW sound pressure: 43dB(A)
 - Intensive: 68 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)


**Series 4, integrated rangehood, 75
cm, Silver metallic
DHL755BAU**

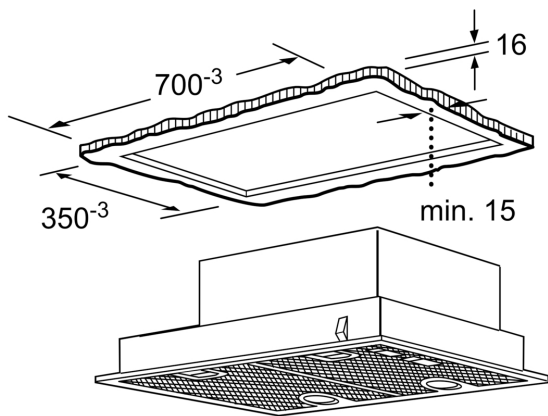


measurements in mm

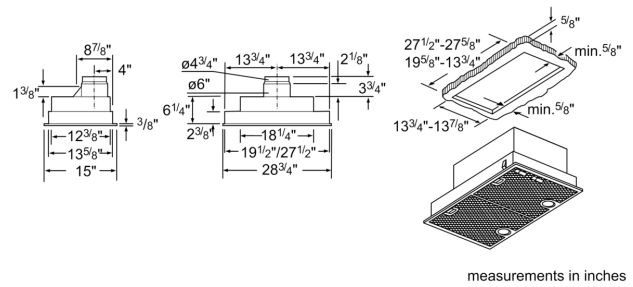


measurements in inches

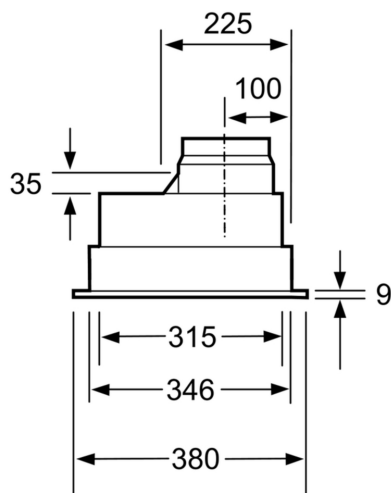

measurements in mm

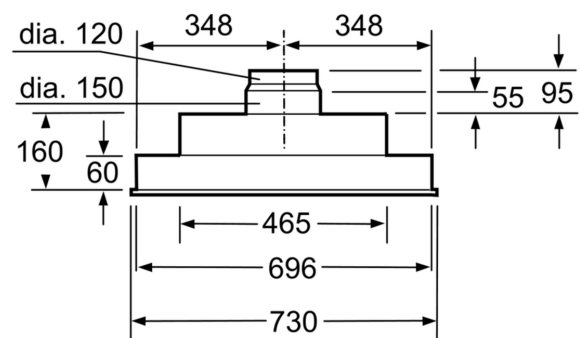

measurements in mm

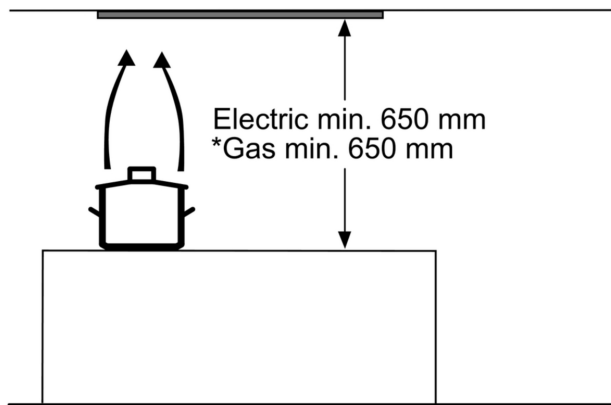

* from upper edge of pan support

measurements in mm