



Frameless for flush mounting.
Flex function for combining the rectangular cooking areas
Flexible positioning of cookware inside combined cooking areas with automatic extension up to 30 cm width
Cooking sensor function for temperature control in pots
Professional cooking function for splitting the cooktop into predefined heat areas
Frying sensor function for temperature control in pans
Twist-Pad control with removable magnetic knob
Easy control of all functions with bicoloured display

Color Variants

CI282102

Included accessories

1 x twist pad.

Optional accessories

CA050300

CA051301

CA052300

CA055300

CA230100

Cooking zones

2 flex induction cooking areas 23x20 cm (2200 W, with booster 3700 W), linked together 23x40 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).
2 flex induction cooking areas 23x20 cm (2200 W, with booster 3700 W), linked together 23x40 cm (3300 W, with booster 3700 W), with automatic extension up to 30x30 cm (3300 W, with booster 3700 W).

Handling

Twist-Pad control with removable magnetic knob.
User friendly control with bicoloured display (white / orange).
Cooking zone and cooking area marking.
Electronic power control in 17 output levels.

Features

Flex function for rectangular cooking areas.
Professional cooking function.
Cooking sensor function (in use with cooking sensor CA 060 300).
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Cooking timer for up to 99 minutes.
Short-term timer.
Options menu.
Power management.

Selected digital services (Gaggenau Home Connect)

Cooktop-based ventilation control (with suitable hood).
Remote monitoring.
Remote diagnostics.
Home network integration for digital services (Home Connect) wireless via WiFi.
The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Main switch.
Operation indicator.
Pot detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.

Planning notes

Characteristics

Product name/family

Cooking zone ceramic

Built-in / Free-standing

Built-in

Energy input

Electric

Total number of positions that can be used at the same time

4

Type of control setting devices

Required niche size for installation (HxWxD)

Width of the appliance

793

Dimensions

56x793x513

Dimensions of the packed product (HxWxD)

130x950x600

Net weight

16.9

Gross weight

19.2

Residual heat indicator

yes

Location of control panel

Front

Type of external control possibility

Ceramic

Basic surface material

Ceramic

Color of surface

Black

Color of frame

Length electrical supply cord

110

Knob Material

Full metal

Sealed Burners

No

Boost function for pots

All cooking zones

Type of pan support

Natural Gas Connection Rating

LP Gas Connection Rating

Dimension of 1st heating element (in)

Power of heating element (kW)

Power of 1st burner

Dimension of 2nd heating element (in)

Power of 2nd heating element (kW)

3300.0

Power of 2nd burner

Dimension of 3rd heating element (in)

Power of 3rd heating element (kW)

Power of 3rd burner

Dimension of 4th heating element (in)

Power of 4th heating element (kW)

Power of 4th burner

Dimension of 5th heating element (in)

Power of 5th heating element (kW)

Power of 5th burner

Dimension of 6th heating element (in)

Power of heating element (kW in boost)

[3.7]

Power of 3rd heating element (kW in boost)

Power of 4th heating element (kW in boost)

Power of 5th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 4th heating element (kW in boost)

Power of 5th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Power of 6th heating element (kW in boost)

Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of sandwich bottom cookware is recommended. Special accessories (order as spare parts):

Part No. 17006018 Frying sensor pan, ø 20 cm

Part No. 17006184 Frying sensor pan, ø 24 cm


Part No. 17006185 Frying sensor pan, ø 28 cm

The wok pan WP 400 001 cannot be used with this appliance.

Appliance must be fixed from underneath.


Appliance weight: approx. 17 kg.

GAGGENAU

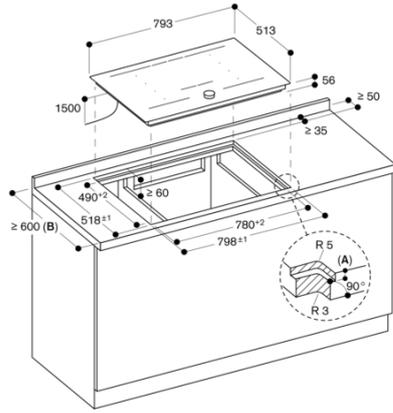


A: $6.5^{+0.5}$
 B: Please check the installation manual if the worktop depth is less than 600 mm.
 measurements in mm

Longitudinal section

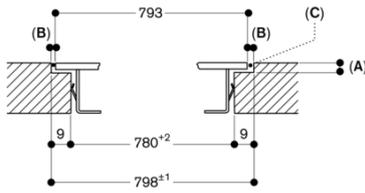


A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone
 measurements in mm

View from above

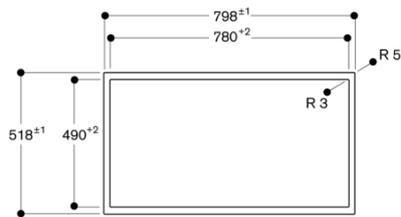

measurements in mm

Cross-section

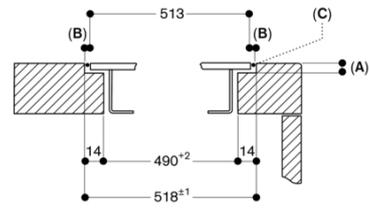

A: $6.5^{+0.5}$
 B: 2.5
 C: Fill with silicone
 measurements in mm